

# DOORS

STEEL WALK DOORS | OVERHEAD DOORS | ROLL-UP DOORS

METALBUILDING  
OUTLET CORP.

## STEEL WALK DOORS

### 3070 DETAILS

(1) 3' X 7' SINGLE  
DOOR LEAF



### 4070 DETAILS

(1) 4' X 7' SINGLE  
DOOR LEAF



### 6070 DETAILS

6' X 7' DOUBLE  
DOOR  
(2) 3' X 7' DOOR  
LEAFS



STEEL WALK DOOR OPTIONS

1

WINDOWS, PANIC HARDWARE, CLOSURES AND OTHER ACCESSORIES SHOWN ARE NOT INCLUDED IN STANDARD DOOR PRICING.  
PLEASE CONSULT WITH YOUR SALES CONSULTANT FOR ROUGH OPENING DIMENSIONS.

METALBUILDING  
OUTLET CORP.

(303) 948-2038 | METALBUILDINGOUTLET.COM

# OVERHEAD DOOR WITH STANDARD LIFT

OVERHEAD DOOR OPTIONS


2



- Used in standard applications with typical headroom or clearance
- Used when headroom is 15" – 36"
- Overhead track
- Trolley door opener or chain hoist
- Can be used in Endwalls or Sidewalls



**\*SPRING MOUNT SUPPORTS ARE NOT STANDARD, AND NOT INCLUDED**

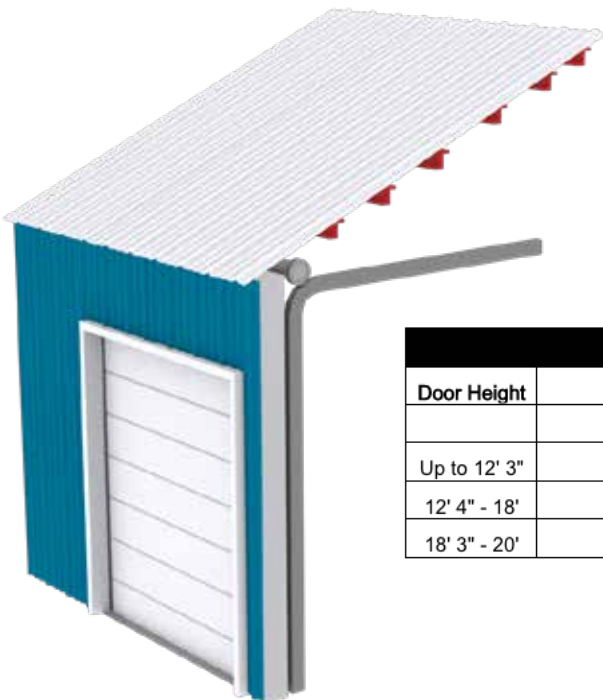

Door Height	Standard Lift Track	
	Minimum Headroom	Minimum Headroom
	2" Track	3" Track
Up to 12' 3"	15-1/2"	16-3/8"
12' 4" - 18'	16-1/2"	17-3/8"
18' 3" - 20'	19-1/2"	20-1/4"

# OVERHEAD DOOR WITH HIGH LIFT



- Used when ceiling height is greater than 36" above door
- Ideal when maximum headroom or clearance is needed in building
- High overhead track
- Jackshaft door opener or chain hoist
- Can be used in Endwalls or Sidewalls
- \* Spring mount supports are not standard, and are not included



OVERHEAD DOOR OPTIONS

3



High-Lift* Track					
2" Track			3" Track		
Drum Used	High Lift	Minimum Headroom	Drum Used	High Lift	Minimum Headroom
D525-54	9" - 54"	High Lift + 10"	D525-54	9" - 54"	High Lift + 11"
D575-120	9" - 120"	High Lift + 12 1/2"	D575-120	9" - 120"	High Lift + 13 1/2"
D6375-164	9" - 164"	High Lift + 13 1/2"	D6375-164	9" - 164"	High Lift + 14 1/2"


# OVERHEAD DOOR WITH FOLLOW ROOF PITCH LIFT

OVERHEAD DOOR OPTIONS

4



- Ideal when maximum headroom or clearance is needed in building
  - Recommended on roof pitches greater than 3:12
  - Track follows roof pitch line
  - Jackshaft door opener or chain hoist
  - Available on Sidewalls only
- \* Spring mount supports are not standard, and are not included

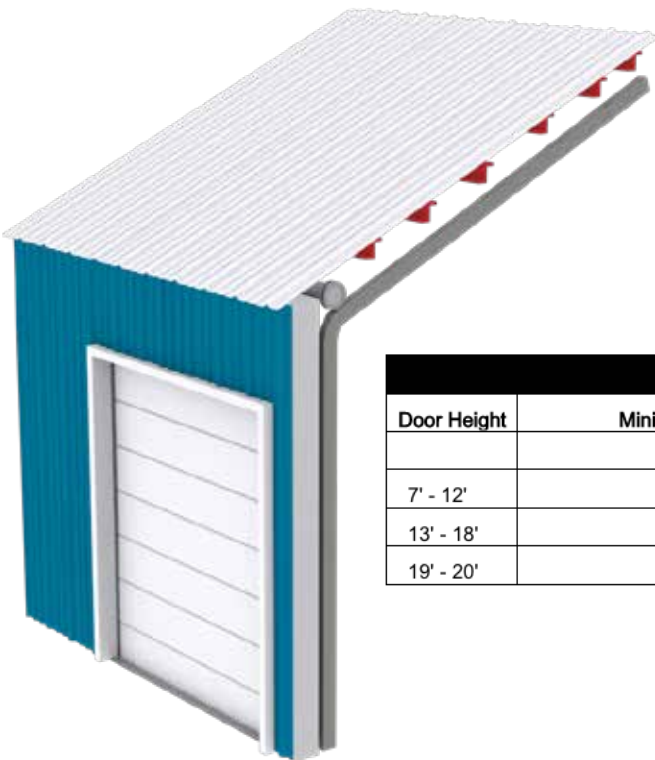

Follow The Roof Pitch Track		
Door Height	Minimum Headroom	
	2" Track	3" Track
7' - 12'	15-1/2"	16-3/8"
13' - 18'	16-1/2"	17-3/8"
19' - 20'	19-1/2"	20-1/4"

# OVERHEAD DOOR WITH FOLLOW ROOF PITCH AND HIGH LIFT




- Ideal when maximum headroom or clearance is needed in building
- Recommended on roof pitches greater than 3:12
- Track follows roof pitch line
- Jackshaft door opener or chain hoist
- Available on Sidewalls only
- \* Spring mount supports are not standard, and are not included



OVERHEAD DOOR OPTIONS

5

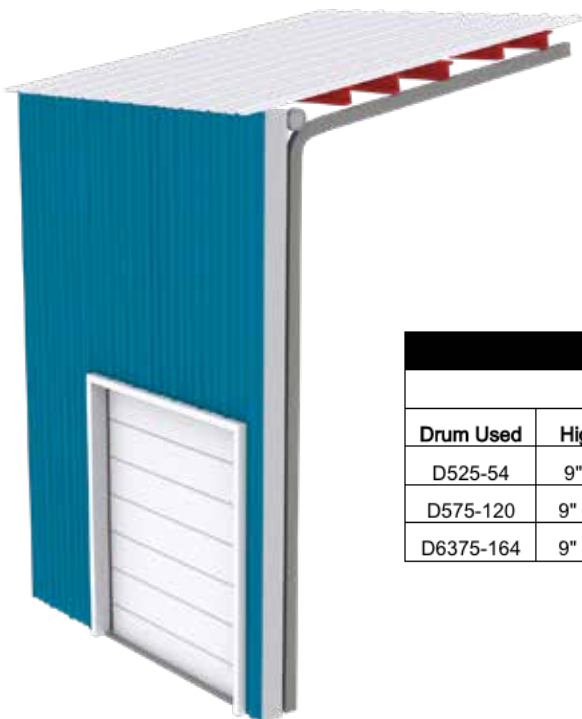

High-Lift* Track					
2" Track			3" Track		
Drum Used	High Lift	Minimum Headroom	Drum Used	High Lift	Minimum Headroom
D525-54	9" - 54"	High Lift + 10"	D525-54	9" - 54"	High Lift + 11"
D575-120	9" - 120"	High Lift + 12 1/2"	D575-120	9" - 120"	High Lift + 13 1/2"
D6375-164	9" - 164"	High Lift + 13 1/2"	D6375-164	9" - 164"	High Lift + 14 1/2"

# OVERHEAD DOOR WITH VERTICAL LIFT

OVERHEAD DOOR OPTIONS

6



- Used when ceiling height is greater than 2 times door height
  - Optimal in equestrian buildings, buildings with mezzanines or cranes
  - Track follows wall line
  - Jackshaft door opener or chain hoist
  - Can be used in Endwalls or Sidewalls
- \* Spring mounted supports are not standard, and are not included



Vertical Lift Track		
Door Height	Minimum Headroom	
	2" Track	3" Track
7' - 18'	Door Height + 13"	Door Height + 12"
19' - 20'	Door Height + 13"	Door Height + 12"

# OVERHEAD DOOR WITH LOW HEADROOM LIFT




- Used to maximize door height or when low ceilings are un-avoidable
  - Used when headroom is less than 15"
  - Overhead track
  - Trolley door opener or chain hoist
  - Can be used in Endwalls or Sidewalls
  - Double Door Track
- \* Spring Mount Supports are not standard, and are not included



OVERHEAD DOOR OPTIONS

7

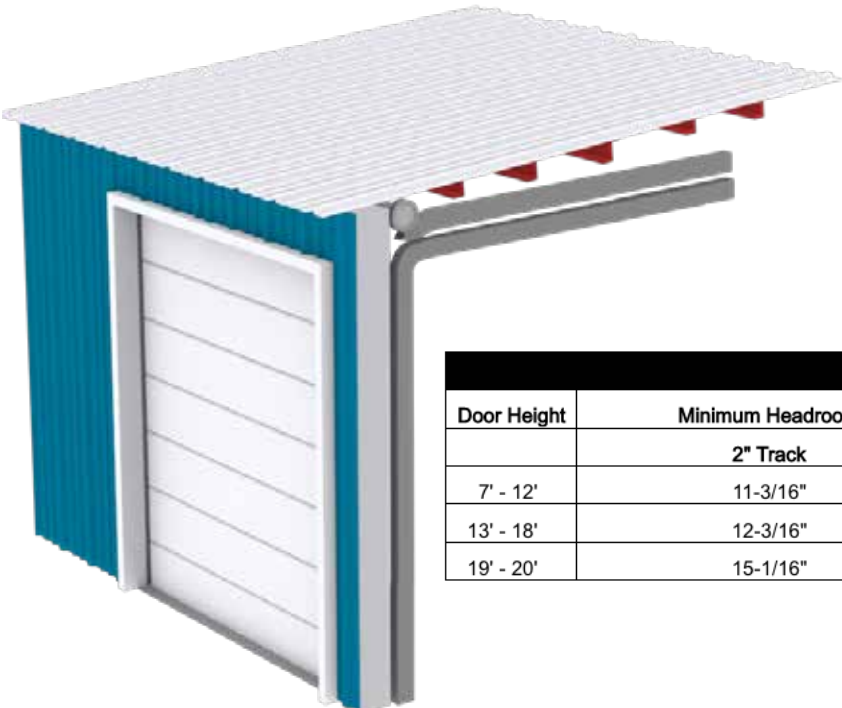

Low Headroom Track		
Door Height	Minimum Headroom	
	2" Track	3" Track
7' - 12'	11-3/16"	12-1/8"
13' - 18'	12-3/16"	13-1/8"
19' - 20'	15-1/16"	16"


# ROLL - UP DOORS

ROLL-UP DOOR OPTIONS

08



- Lightweight 26 ga sheet door
- Door coils above rail guides, eliminating separate track
- Maximizes overhead space
- Non-insulated
- Can be used in Endwalls or Sidewalls

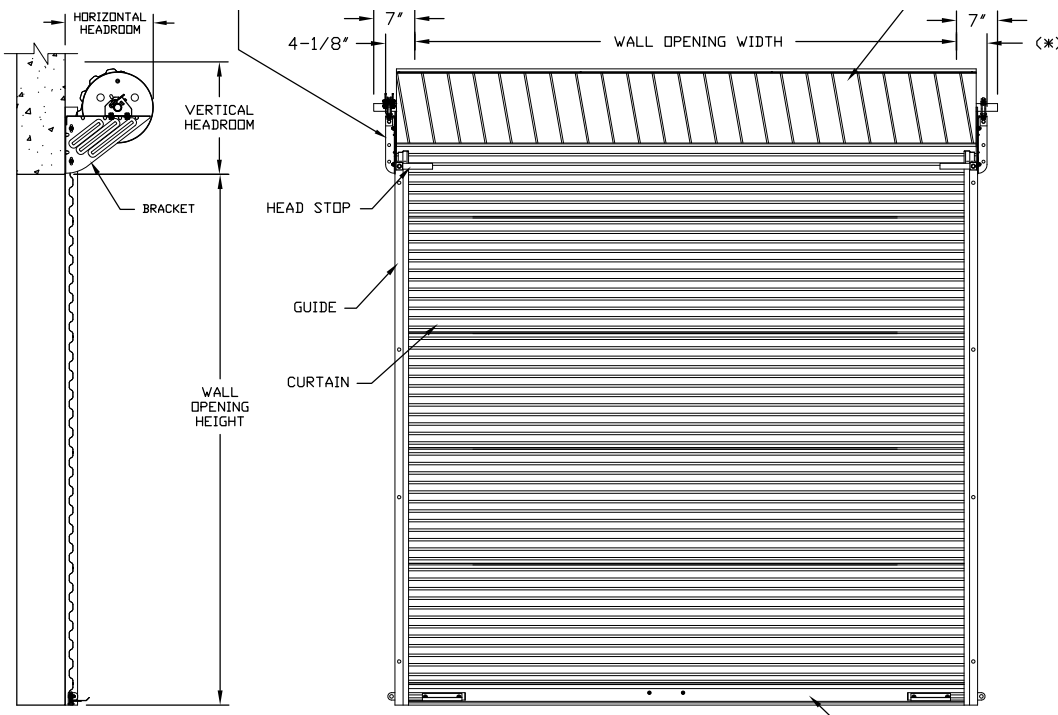

HEADROOM REQUIRED

OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THRU 8'-0"	17"	19"
OVER 8'-0" THRU 10'-0"	19"	21"
OVER 10'-0" THRU 14'-0"	20"	22"
OVER 14'-0" THRU 16'-0"	21"	23"
OVER 16'-0" THRU 18'-0"	22"	24"
OVER 18'-0" THRU 20'-0"	23"	25"